



KBD-CSK-100

Article-No.: 74217

System Keyboard with 3-Axis
Joystick, 12VDC

Mainfeatures

Controls up to 255 devices
Multiple protocol supported in each channel
Built-in 3-axis proportional joystick
Built-in 2 lines character LCD display
DVR interface

RS-422/RS-485 communication
Programmable presets, tours, patterns and others
Easy upload programmed data
Programmable transmission speed for each ID
User password support


Specifications

Operation Mode	Single operation
Video input	-
Audio inputs	-
Joystick	3-axis proportional joystick for manual control of variable speed
Multiplexer/camera control	up to 255 cameras
Site control (direct mode operation)	Camera select keys. Operate presets, patterns, auxiliaries, and sequences. Camera functions: pan, tilt, zoom, focus, for variable speed control
Baud rate	2400, 4800, 9600 and up to 57,600 Baud
Control functions	Joystick: Pan/tilt/zoom/menu operation, Key switches: Zoom /focus (Iris Open/Close: via F buttons), DVR control
Protocols	Pelco P&D and others (supported in each channel)
Interface	RS-485 (Camera and DVR), USB 2.0
LCD display	16x2 characters
Password protection	included
Supply voltage	12VDC (PSU 100-240VAC, 50/60Hz included)
Power consumption	1.7W

Specifications (continued)

Colour	Pantone Warm Gray 1C
Temperature range	0°C ~ +45°C
Dimensions (HxWxD)	see drawing
Weight	690g
Parts supplied	PSU 100~240V/12VDC with power cord, USB cable, manual
Certificates	CE

Technical Drawing

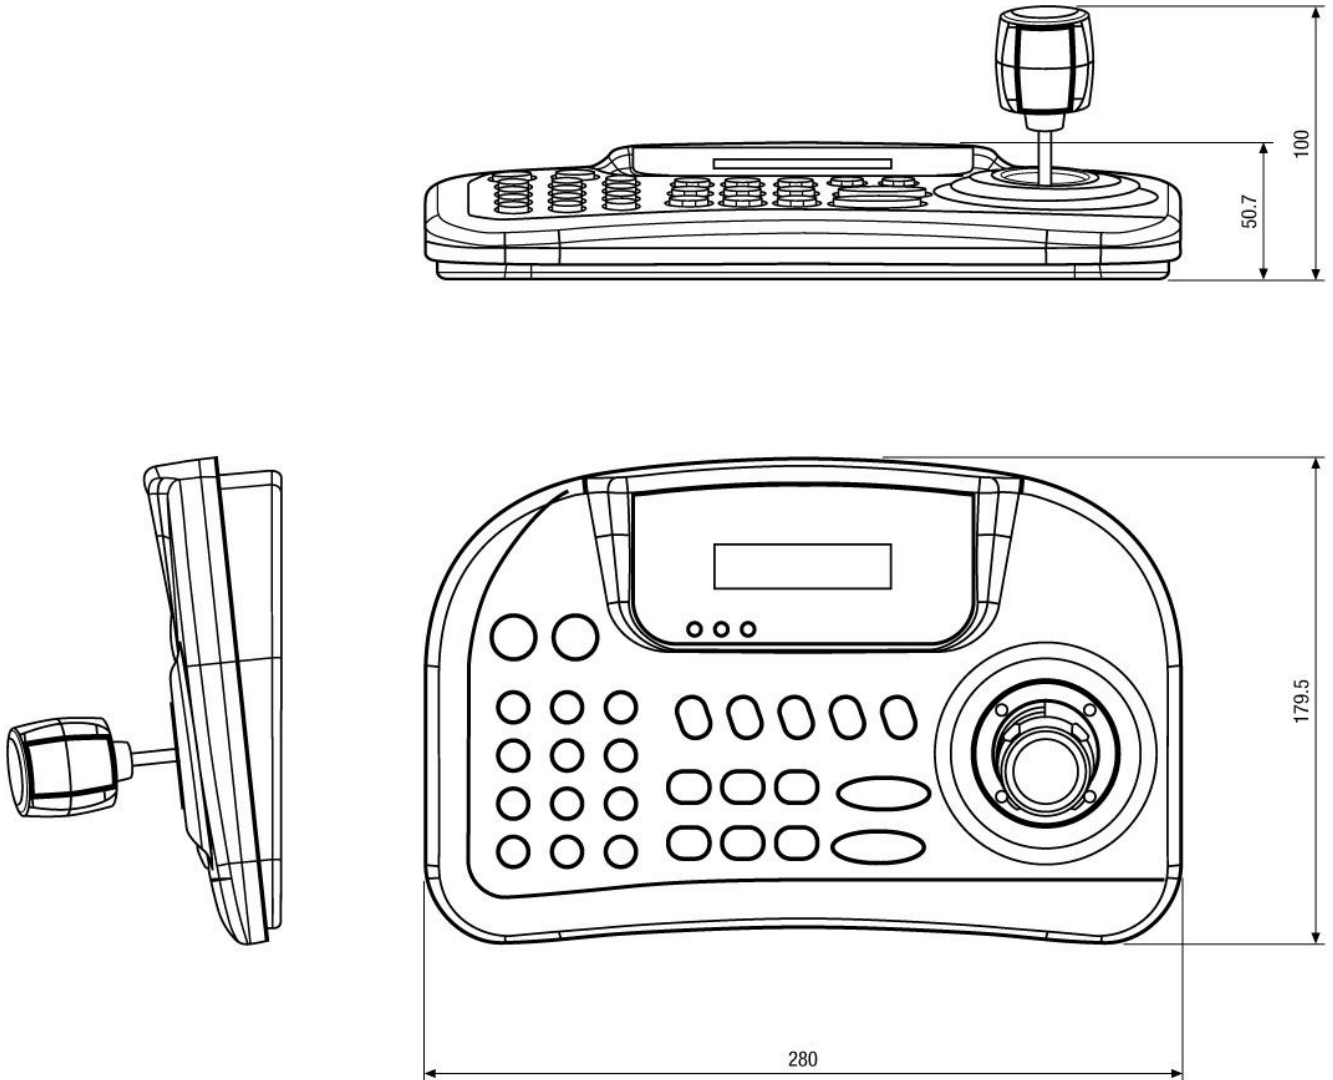

Maße/Dimensions: mm



Your partner for eneo products:

